

(http://gis.ny.gov/elevation/index.cfm)



## **DRIFT THICKNESS OF** MONROE COUNTY, NEW YORK

## Richard A. Frieman

2024

Beginning in 2019, under the guidance and funding provided by the United States Geological Survey - Great Lakes Geological Mapping Coalition (award G20AC00401), the New York State Museum - Geological Survey began a statewide effort to conduct geologic mapping of bedrock elevations throughout New York. Monroe County, of Western New York, is bound from west to east by Orleans, Genesee, Livingston, Ontario and Wayne Counties. It is also bounded to the north by Lake Ontario. Surficial and subsurface bedrock point data and maps were compiled from publicly available sources, vetted, and organized into a comprehensive geospatial database. A technical workflow was developed to categorize the overall geology and differentiate between the underlying bedrock and overlying unconsolidated sediments. The resulting bedrock elevation map provides a detailed representation of bedrock topography across Monroe County. This map is useful for various applications, including geological studies, engineering and construction, natural resource management (such as water or mineral resources), and environ-


A total of 1,163 bedrock control points were used to delineate bedrock topography in Monroe County. These points consisted of 614 bedrock outcrops, 423 water wells and 116 engineering boreholes. These data were compiled from a variety of public sources and imported into ESRI's ArcMap 10.8 software platform. Ground surface elevations for all control points were extracted from the highest available resolution LIDAR DEM data available and subsequently resampled to a cell size/resolution of 1m x 1m. Bedrock elevations were calculated at each location by subtracting the depth-to-bedrock from the ground surface elevation. Bedrock elevation contours generated by ArcMap at a 50-foot interval were manually refined through a multi-step quality control process to resolve any interpolation errors. The finalized contours were converted into a 1-meter raster, using the "Topo to Raster" tool, the product of which is the county-wide bedrock topography map. Lastly, the "Raster

Calculator" tool is used to subtract the surface elevation from the bedrock elevation to determine the thickness of the drift in the county.

## Summary

50ft Drift Thickness Contour

The New York State Museum – Geological Survey has developed a detailed Drift Thickness Map for Monroe County. This map represents a compilation of various surficial and subsurface bedrock data sources, analytical methods, and quality control procedures. The resulting bedrock elevations reveal a range of distinct geological features including a variety of Paleozoic bedrock erosional profiles, and evidence of past glaciation. These characteristics are likely the result of a variety of functions including bedrock stratigraphy, structural deformation, and erosional processes such as past glaciation and fluvial geomorphology. This map is significant for applications in geological research, engineering, natural resource management, and environmental studies. Continued research and work on subsurface geology will provide additional data and insight and enhance the geologic framework of bedrock geology throughout New York State.

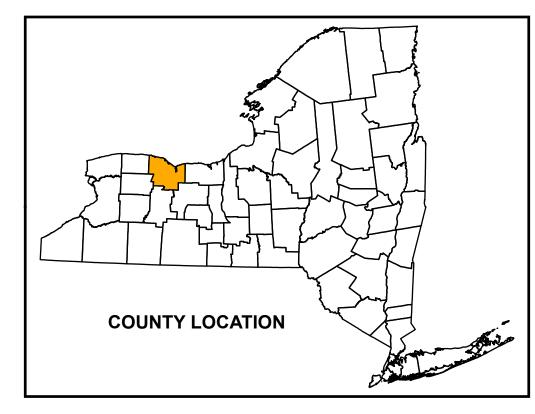

## **DRIFT THICKNESS CONTOUR MAP**



New York State Museum Map & Chart No. 186 ISSN:0097-3793 ; ISBN:978-1-55557-440-6